


HS721 Pneumatic pressure comparison pump

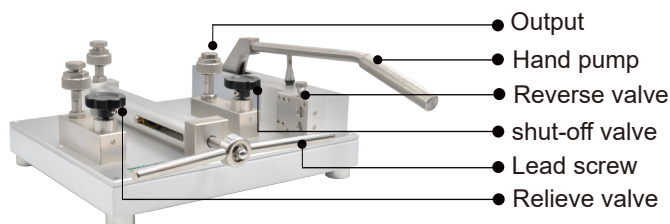

1. Pressure high up to 140bar
2. Three Outputs

Description

HS721 Pneumatic pressure comparison pump consists of hand pump, lead screw, reverse valve, relieve valve & output interface. Generate pressure from vacuum to 60bar and 140bar. It features in high sealed performance, stable pressure generating and simple operation. It is suitable in the laboratory. It can supply the pressure for calibrating pressure transmitters, precise pressure gauges, general pressure gauges and other pressure instruments.

Specifications

- Pressure range: (-0.95~60/100/140) bar
- Working Media: air
- Adjust resolution: 0.1mbar
- Material
 - Body: Stainless Steel /Aluminium
 - Seals: Buna-N
- Output Interface: M20×1.5 Female
- Dimensions: 320mm×390mm×180mm
- Weight: 14Kg



Ordering Code

Model

HS721-1(-0.95~60) bar
 HS721-2(-0.95~100) bar
 HS721-3(-0.95~140) bar

M -M20×1.5 F M-Connection
 N4-1/4"NPT F
 N4Type, MOQ 5pcs


Standard delivery

O ring: 10pcs
 Test report
 Manual: 1copy
 Air cell: 1pc

Optional Accessories

Model	Description
HS721-HSPA01	Fitting adaptor 10pcs
HS721-HSPA02	Fitting adaptor 10pcs
HS721-HSPA18	Fitting adaptor 18pcs
HS721-HSPA64	Fitting adaptor, hose, wrenches and so on (64pcs)
HS721-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS721-2	Pressure calibrator HS602 for calibration pressure transmitter

HS728 Hydraulic Pressure Comparison Pump

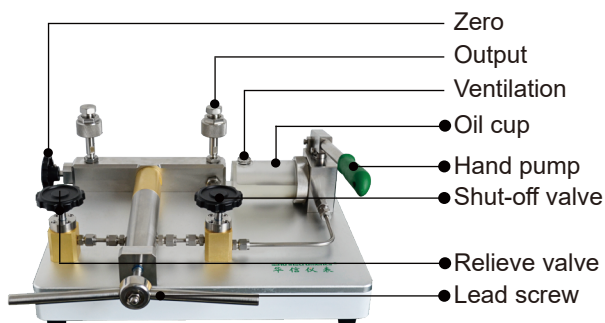

- 1. Range up to 1400bar
- 2. Fast stability, save labor

Description

HS728 Hydraulic Pressure Comparison Pump adopts advanced stainless steel material with bench-top structure and designed to generate pressure range up to 1200bar. It is fitted with hand pump which could quickly pressurize to the whole system; perfectly integrated operation of hand pump & zero valve help user to accomplish high pressure points calibration, closing Shut off valve during pre-pressurizing 150bar in order to get high pressure ranges. the special F-adjust valve design makes the high pressure operation more easy and save labor. the detachable oil cup is easy to clean and maintenance, checking work medium timely from outside. It widely calibrates pressure instrument in the laboratory.

Specifications

- **Generated pressure range:** (0~1000/1200/1400)bar
- **Working media:**
25#transformer oil
(Distilled water for HS728A 0-1000bar)
- **Material :**
Body: Stainless Steel/Aluminium
Seals: Buna-N
- **Adjust resolution:** 1mbar
- **Output interface connection:**
M20x1.5Female
- **Weight:** 18kg
- **Dimensions:** 44Lx38Wx23H(mm)



Ordering Code

Model

HS728	Model
M -M20×1.5 F	M-Connection
N4-1/4"NPT F	
N4Type, MOQ 5pcs	

Standard delivery

O ring: 10pcs
Test report & Manual: 1 copy
Air cell: 1pc

Optional Accessories

Model	Description
HS728-HSPA01	Fitting adaptor 10pcs
HS728-HSPA02	Fitting adaptor 10pcs
HS728-HSPA18	Fitting adaptor 18pcs
HS728-HSPA64	Fitting adaptor, hose, wrenches and so on (64pcs)
HS728-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS728-2	Pressure calibrator HS602 for calibration pressure transmitter