


HS710 Hydraulic Pressure Comparison Pump

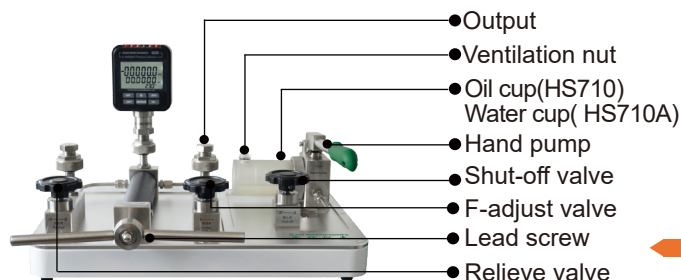

- 1.Range up to 700bar
- 2.Sliding block structure for second pump ,more save labor

Description

HS710 Hydraulic Pressure Comparison Pump adopts advanced stainless steel, with bench-top structure and designed to generate pressure range up to 700bar. The sliding block structure for screw pump design makes the high pressure operation more easy and save labor, and saves operation space without screw outside. That special F-adjust valve adjusts the exact pressure value and calibrate 2.5bar pressure instruments .The detachable Oil cup is easy to clean and maintenance, checking work medium timely from outside. 3pcs output with quick coupling makes it calibrated pressure instruments together. It widely calibrates pressure instrument in the laboratory.

Specifications

- **Generated pressure range:**(0~600/700)bar
- **Working media:**
25#transformer oil (Distilled water for model HS710A)
- **Material :**
Body:Stainless Steel/Aluminium
Seals:Buna-N
- **Adjust resolution:**1mbar
- **Output interface connection:**
M20×1.5Female
- **Weight:**14.9Kg
- **Dimensions:**430L×330W×170H (mm)



Ordering Code

Model

HS710	Model
HS710A	
M -M20×1.5 F	M-Connection
N4-1/4"NPT F	
N4Type,MOQ 5pcs	


Standard delivery

O ring:10pcs
Test report&Manual:1copy
Air cell:1pc

Optional Accessories

Model	Description
HS710-HSPA01	Fitting adaptor 10pcs
HS710-HSPA02	Fitting adaptor 10pcs
HS710-HSPA18	Fitting adaptor 18pcs
HS710-HSPA64	Fitting adaptor,hose,wrenches and so on (64pcs)
HS710-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS710-2	Pressure calibrator HS602 for calibration pressure transmitter

HS711/HS711A Hydraulic Pressure Comparison Pump

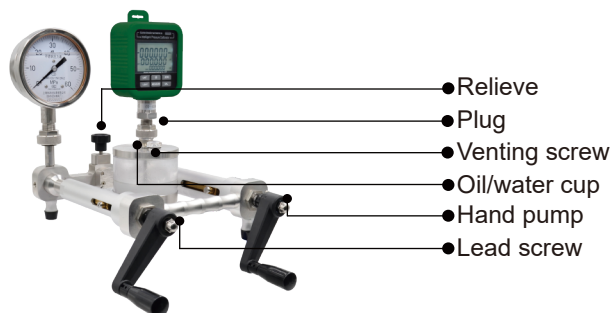

1. Pressure range up to 700bar
2. Easy increasing pressure, convenient maintenance

Description

HS711/HS711A Hydraulic comparator adopts special process with high quality aluminum alloy and pinning inside design, which make it high sealing quality, easy to clear. With the advantage of fast connection, easy generate pressure, quick pressurizing, long time keep pressure, higher accuracy, it have been widely used in Lab and Field on the pressure gauge calibration. It can be widely used in power, chemical, petrol, metallurgy, metering, military industry, etc.

Specifications

- **Model:** HS711/HS711A Hydraulic Comparator
- **Generated pressure range:** (0~600/700)bar
- **Working medium:** Oil/Distilled water
- **Adjust resolution:** 0.001bar(0.1kPa)
- **Material:** Stainless Steel/Aluminum for body; Stainless steel for outputs; Buna-N for seals
- **Output interface connection:** M20×1.5Female
- **Package:** Carrying black bag. Specialized cartons and foam wrap(optional)
- **Dimensions:** 320L×240W×140H(mm)
- **Weight:** 5.0kg



Ordering Code

Model

HS711	Model
HS711A	
M -M20×1.5 F	M-Connection
N4-1/4"NPT F	
N4Type,MOQ 5pcs	

Standard delivery

O ring:10pcs
Test report&Manual:1copy
Air cell:1pc

Optional Accessories

Model	Description
HS711/HS711A-HSPA01	Fitting adaptor 10pcs
HS711/HS711A-HSPA02	Fitting adaptor 10pcs
HS711/HS711A-HSPA18	Fitting adaptor 18pcs
HS711/HS711A-HSPA64	Fitting adaptor,hose,wrenches and so on (64pcs)
HS711/HS711A-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS711/HS711A-2	Pressure calibrator HS602 for calibration pressure transmitter